



**PKR 261, metal sealed, DN 40 CF-F**






Similar Image

## PKR 261, metal sealed, DN 40 CF-F

- FullRange® gauge with two sensors in one housing
- Display range from  $5 \cdot 10^{-9}$  to 1000 hPa
- Flange size: DN 40 CF-F
- Maximum pressure refers to inert gases and temperatures of less than 55 °C
- Corrosion-resistant

### Dimensions

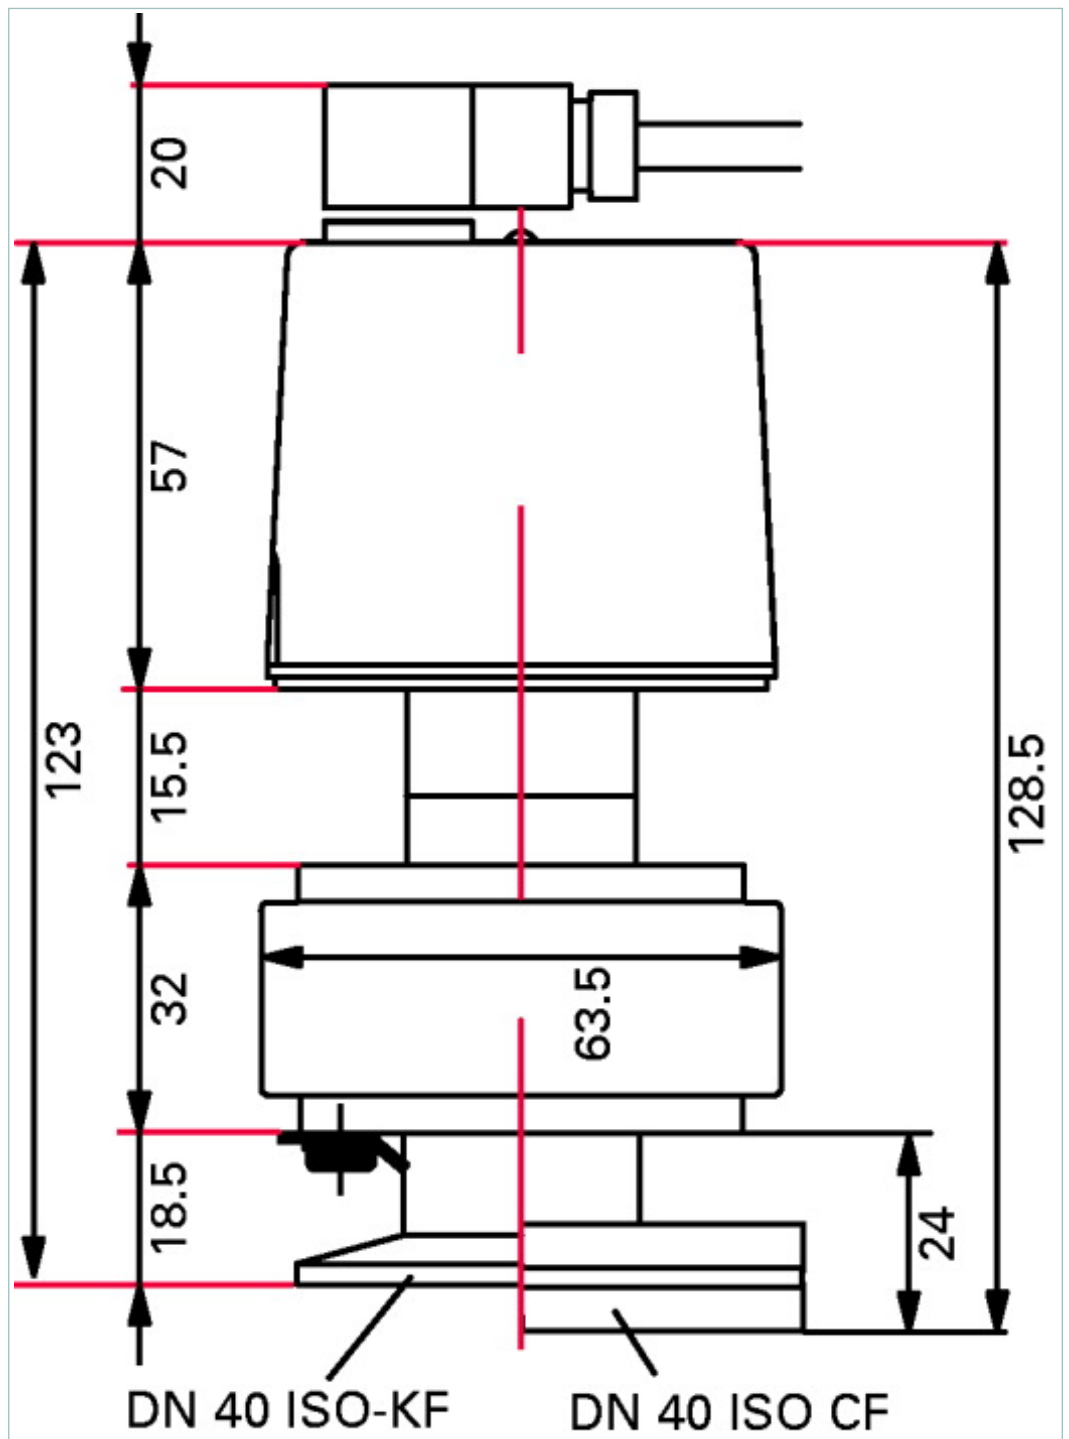

Technical Data	PKR 261, metal sealed, DN 40 CF-F
Accuracy: $10^{-8}$ - $10^2$ hPa	$\pm 30$ %
Anode	Molybdenum
Bakeout temperature	Electronic removed, $\leq 150$ °C   Electronic removed, $\leq 302$ °F   Electronic removed, $\leq 423$ K
Feature	Metal sealed
Feedthrough	Al <sub>2</sub> O <sub>3</sub> , Glas
Filament	Tungsten
Flange	Stainless steel
Measurement range max.	1,000 hPa   750 Torr   1,000 mbar
Measurement range min.	$5 \cdot 10^{-9}$ hPa   $3.75 \cdot 10^{-9}$ Torr   $5 \cdot 10^{-9}$ mbar
Method of measurement	Pirani/Cold Cathode
Nominal diameter	DN 40 CF-F
Output signal: Minimum load	10 k $\Omega$
Output signal: Pressure range	1.8 - 8.6 V
Output signal: Sensor error above	9.5 V
Output signal: Sensor error below	0.5 V
Pressure max.	10,000 hPa   7,500 Torr   10,000 mbar
Repeatability: $10^{-8}$ - $10^2$ hPa	$\pm 5$ %
Seal	Ag, Cu
Sensor cable length	300 m
Supply: Power consumption max.	2 W
Supply: Voltage	15-30 V DC
Temperature: Operating	5-55 °C *
Temperature: Storage	-40-65 °C   -40-149 °F   233-338 K
Volume	20 cm <sup>3</sup>
Weight	995 g

\* Operating temperature: up to 150 °C at the flange if mounted horizontally

Order number
PKR 261
PT R26 252

Accessories
Accessory for ActiveLine gauges and controllers
Mating connector
Sensor cable, 3 m
B 4707 283 MA
PT 448 250 -T